

POC-153

Point of Care Terminal with 15" TFT LCD



Features

- Point-of-Care terminal for eHealthcare/Medical Applications
- 350 cd/m², 500:1 contrast ratio LCD for better X-Ray image quality
- Spill and dust resistant
- UL60601-1/EN60601-1, CE & FCC Class B certified
- 802.11b wireless antenna and touchscreen (optional)

Introduction

The POC-153 is a medical grade multimedia Panel Computer. This medical system is UL60601-1/EN60601-1 approved. The low-current-leakage power supply enables it to act an ideal and secure point-of-care solution for patients and hospital practitioners.

The POC-153 is specially designed to resist spills and water damage, and ensures dust resistance with its protected LCD, sealed ports and card slots. It is equipped with a high brightness 350 cd/m² LCD. Its 500:1 contrast ratio makes the POC-153 a perfect image terminal in PACS & DICOM applications.

Specifications

General

- **Dimensions (W x H x D)** 414 x 339 x 115 mm (16.30" x 13.34" x 4.52")
- **Weight** 6.5 kg (14.4 lb)
- **Power Supply**
AC model: 80 watt
Input voltage: 100 ~ 250 V_{AC}, 3 A max. @ 50 ~ 60 Hz
Output voltage: +5 V @ 12 A, +12 V @ 1 A
DC model: 60 watt
Input voltage: 24 V_{DC}, 5 A max or 12 V_{DC}, 7 A max
Output voltage: +5 V @ 10 A, +12 V @ 1 A
- **Cooling Fan Dim. (L x W x H)** 60 x 60 x 10 mm (2.4" x 2.4" x 2.4")
- **Front Panel** IP65/NEMA 4 compliant

Standard PC Function

- **CPU** Supports socket 370 based Intel® Pentium® III/ Celeron™/ VIA® C3 CPU up to 1.26 GHz
- **Memory** Supports up to 1 GB SDRAM
- **HDD** One 2.5" IDE HDD
- **FDD** 1.44 MB
- **CD ROM** Slim type (Optional: CD-RW / DVD-ROM)
- **PCMCIA** Type II x 2
- **I/O Ports & Speakers** 4 Serial ports: RS-232 x 3, RS-232/422/485 x 1, 1 parallel port
2 USB ports
1 PS/2 mouse and keyboard interface
Mic-in
Line-in
Speaker-out
1 W speakers x 2

- **Network (LAN)** 10/100Base-T Ethernet interface
- **Bus Expansion** One PCI expansion slot
- **Optional** 802.11b wireless antenna with wireless LAN PCMCIA module

Display Specifications

- **Display Type** 15" TFT LCD
- **Max. Resolution** 1024 x 768
- **Colors** 256 K (6 bits/color)
- **Dot Size (mm)** 0.297 x 0.297
- **Viewing Angle** 140 degrees
- **Luminance** 350 cd/m²
- **Contrast Ratio** 500:1
- **Backlight Lifetime** 50,000 hours

Environmental Specifications


- **Operating Temperature** 0 ~ 40° C
- **Relative Humidity** 10 ~ 95% @ 40° C (non-condensing)
- **Shock** 10 G peak acceleration (11 msec duration)
- **Power MTBF** 100,000 hrs
- **Certifications** CE, FCC, VCCI, BSMI approved
- **AC Model** UL60950, UL60601-1, EN60950, EN60601-1 approved
- **DC Model** FCC, UL 2601-1, EN60601-1 approved

Touchscreen

- **Type** Analog Resistive
- **Resolution** Continuous
- **Light transmission** 75%
- **Controller** RS-232 interface (use COM4)
- **Durability** 30 million touches

Dimensions

Unit: mm

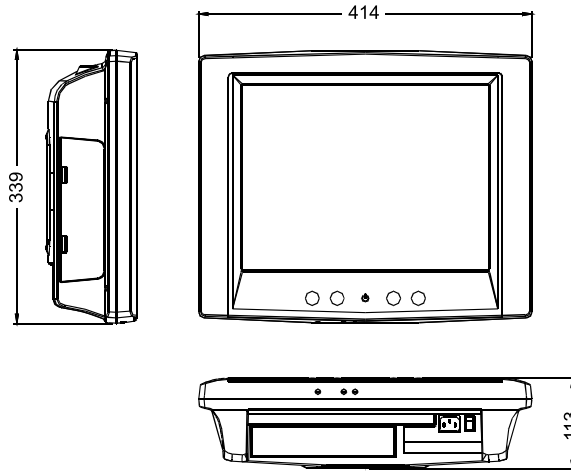

Ordering Information

- **POC-153CD-AC-C** POC-153 Bare with CDROM/AC input
- **POC-153CD-AC-CS** POC-153 Bare with CDROM/AC input/SAW.TS
- **POC-153CD-AC-CT** POC-153 Bare with CDROM/AC input/Res.TS
- **POC-153CB-AC-C** POC-153 Bare with COMBO/AC input
- **POC-153CB-AC-CS** POC-153 Bare with COMBO/AC input/SAW.TS
- **POC-153CB-AC-CT** POC-153 Bare with COMBO/AC input /Res.TS
- **POC-153 STAND** Desktop stand for POC-153 series

Optional Items

- POC-153 with 12 V_{DC} inlet or 24 V_{DC} inlet (Production upon order received)
- 802.11b wireless antenna with PCMCIA module

Mounting

- **VESA** 75 x 75 mm, 100 x 100 mm

