

# MIC-3358A

## 6U CompactPCI® Intel® Pentium® 4 Processor-M Board with VGA/Dual Gigabit LAN/PMC (PICMG® 2.16)

**NEW**



### Features

- Supports Intel® Pentium® 4 Processor-M up to 2.5 GHz
- Dual Gigabit Ethernet on board
- Up to 2 GB (DDR-266) memory on board with ECC
- Intel® 845E chipset
- One 32-bit/33 MHz PMC expansion slot
- PICMG® 2.16 compliant with Packet Switching Backplane Specification
- Hot-Swap Specification compliant (PICMG 2.1)
- On-board 2.5" HDD connector and CompactFlash socket
- System/Drone mode selectable

CE FCC

### Introduction

The MIC-3358A is a high-performance Intel® Pentium® 4 Processor-M based CompactPCI server blade, fully compliant with the PICMG 2.16 Packet Switched Backplane specification. It provides a cost effective platform for applications which demand lower power and high performance.

The MIC-3358A can be used in either a system slot or peripheral slot, making it an ideal choice for emerging applications requiring fast switched-fabric interconnection between blades. It is also designed in compliance with the PICMG 2.9 specification to cooperate with remote system and platform management modules. With these features and full hot swap functionality, the MIC-3358A is well-suited for mission critical telecom and data communication applications where high availability is essential, such as 3G wireless infrastructure, Voice-over-IP, media gateways, soft switches and triple-play server clusters.

The MIC-3358A is architected around the Intel Pentium 4 Processor-M and the Intel 845E chipset. It excels as a high performance CompactPCI platform, delivering compelling system bus performance across a 400 MHz Intel NetBurst. microarchitecture. Its innovative wider data paths and flexible memory refresh technology maximize DDR SDRAM performance.

In addition to its full array of industry standard I/O features, the MIC-3358A also provides dual Gigabit Ethernet ports and one PMC site for on-board I/O expansion. The MIC-3358A sin

### Specifications

Processor System	CPU (CPU not included)	Intel® Pentium® 4 Processor-M
	Max. Speed	2.5 GHz (400 MHz FSB)
	L2 Cache	512 KB on die
	Chipset	Intel® 845E + ICH4
	BIOS	Award 4 Mbit Flash (Network booting/Console Redirect optional)
Bus	Front Side Bus	400 MHz
	PCI	32-bit/33 MHz
Memory	Technology	DDR-200/266 SDRAM with ECC support
	Max. Capacity	2 GB
	Integrated	512 MB/1 GB/2 GB memory on board (No onboard SO-DIMM connector for upgradability)
Graphic	Controller	ATI RageXL
	VRAM	8 MB on board
Ethernet	Interface	10/100/1000Base-TX Gigabit Ethernet
	Controller	Intel® 82540 x2
	I/O Connector	RJ-45 x1 (Front)
EIDE	Mode	ATA 33/66/100 mode
	Channel	2
	Storage Site	One IDE connector and space reserved for embedded 2.5" HDD
PCI-to-PCI Bridge	Interface	System/Drone mode capability
	Controller	HiNT HB6
	System Bus	Up to 64-bit/33 MHz
Front I/O Interface	LAN	1
	Serial	1 (RS-232, RJ-45 connector)
Operating System	Compatibility	Windows 2000/NT 4.0/XP, Red Hat Linux 8.0 and 9.0, VxWorks
Hardware Monitor	Controller	Winbond W83782D
	Monitor	CPU temperature, 3.3 V/5 V/12 V
Watchdog Timer	Output	Interrupt, system reset, NMI
	Interval	Programmable, 0-255 sec.
PMC	Site	1
	Interface	32-bit/33 MHz PCI Mezzanine (IEEE1386.1)
	Signal	+5 V/+3.3 V compliant

## Specifications Cont.

Miscellaneous	Solid State Disk	1 CompactFlash socket			
	LEDs	HDD, power, hot swap			
	USB (2.0)	2 channels			
	Real Time Clock	Built-in the South Bridge			
Power Requirement (Intel Pentium 4 M 1.7GHz)	Voltage	+3.3 V	+5 V	+12 V	-12 V
	Maximum	4.43 A	4.9 A	35 mA	<25 mA
Environment	Temperature	Operating 0 ~ 55° C (32 ~ 131° F)		Non-Operating -40 ~ 70 °C (-40 ~ 158 °F)	
	Humidity	-		95% @ 60°C (non-condensing)	
	Shock	20 G		50 G	
	Vibration (5-500 Hz)	1.5 Grms		2.0 Grms	
Physical Characteristics	Dimensions	233.35 x 160 mm (9.19" x 6.3"), 1-slot width			
	Weight	0.8 kg (1.76 lb)			
Compliance	Standard	PICMG 2.0, R3.0 CompactPCI Specification PICMG 2.1, R2.0 Hot-Swap Specification PICMG 2.16, R1.0 Packet Switching Backplane Specification			

## Recommended Configurations

CPU Board	PMC Module	Rear I/O Board	Enclosure
MIC-3358A	MIC-3665-A, MIC-3665-B	RIO-3309C-A RIO-3309S-A1 RIO-3309S-A2	MIC-3036-A/S2, MIC-3039-B, MIC-3056A, MIC-3038A/C, MIC-3041A/B/C/CW/L, MIC-3042A/B, MIC-3081A/B*, MIC-3082A, CP-150

\* MIC-3081A doesn't support RIO-3309S-Ax

## Rear Transition Board

Part Number	Rear Panel							On-board Header / Socket / Connector						Slot Width	
	KB & Mouse	COM2*	GbE LAN	VGA	USB	10/100 LAN**	SCSI	IDE	FDD	SCSI	COM1	PRT	USB		Conn.
RIO-3309C-A	1	1	2	1	1	1	-	1	1	-	1	1	1	J3/J5	1
RIO-3309S-A1	1	1	2	1	1	1	-	1	1	1	1	1	1	J1/J2/ J3/J5	1
RIO-3309S-A2	1	1	2	1	1	1	1	1	1	-	1	1	1	J1/J2/ J3/J5	1

\* Supports RS-232/422/485 selectable

\*\* Optional for 3rd LAN from MIC-3358 but occupies the I/O port for COM2.


## Ordering Information

Part Number	Front Panel I/O					On-board Main Features				
	LAN	COM	PMC	USB	VGA	CPU	Memory	EIDE Channel	CF Socket	Slot Width
MIC-3358A-M0 *	1	1	1	2	1	-	512 MB	2.5" HDD	1	1
MIC-3358A-M1 *	1	1	1	2	1	-	1 GB	2.5" HDD	1	1
MIC-3358A-M2 **	1	1	1	2	1	-	2 GB	2.5" HDD	1	1

\* Please order RIO module (refer to above table) with MIC-3358 for rear I/O access.

\*\* Please contact your local distributor for MIC-3358A-M2 availability.

\*\*\* The above part numbers do not include the CPU, please order separately.

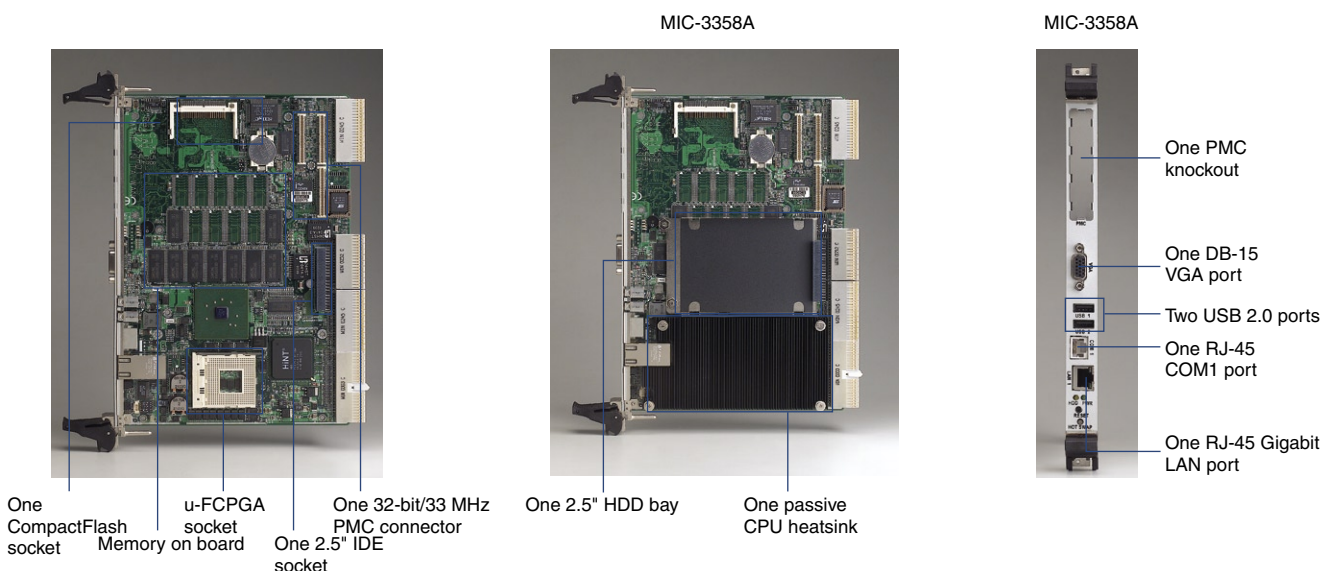

- 1 Industrial Motherboards
- 2 Industrial Motherboard Chassis
- 3 PICMG Single Board Computers
- 4 Industrial Computer Chassis
- 5 Industrial Computer Peripherals
- 6 6U CompactPCI Enclosures
- 7 6U CompactPCI Boards
- 8 6U CompactPCI I/O
- 9 6U CompactPCI Accessories
- 10 3U CompactPCI Systems
- 11 Internet Security Platforms
- 12 Network Application Ready Platforms