


PCM-9371

ULV Intel® Celeron®/LV Intel® Pentium® III
SBC with CPU, Audio, VGA/LCD and LAN

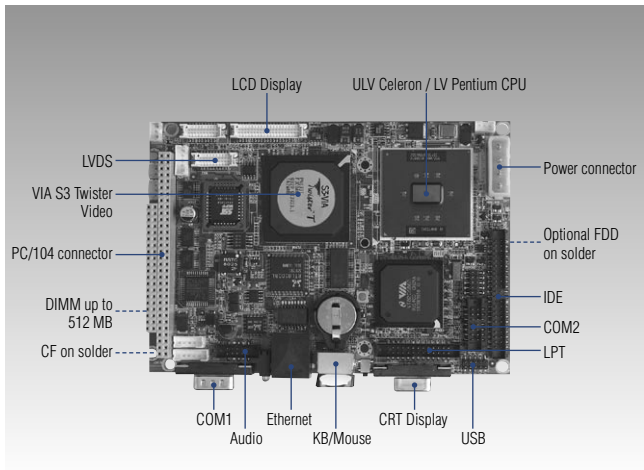

Specifications

General

- **CPU**
Intel Ultra Low Voltage Celeron or Low Voltage Pentium III Processor
ULV Celeron 400 MHz (PCM-9371F-J0A1)
ULV Celeron 650 MHz (PCM-9371F-M0A1)
LV Pentium III 933 MHz (PCM-9371F-R0A1)
- **2nd Cache Memory**
256 KB/512 KB on the Celeron/Pentium III processor
- **System Chipset**
VIA PN133T (VT8606, VT82C686B, 133 MHz FSB)
- **BIOS**
AWARD 256 kbit Flash BIOS
- **System Memory**
SDRAM 144-pin PC/100 or 133 SODIMM x 1, Max. 512 MB
- **Power Management**
- **SSD**
CompactFlash® card Type I/II
- **WatchDog Timer**
1 - 62 sec, 62-level timer intervals system reset or IRQ11
- **Expansion Interface**
PC/104 and COM1, Ethernet, KB/Mouse, Connectors location same as PCM-5820/PCM-5824
- **Battery**
Lithium 3 V/196 mAh

I/O

- **I/O Interface**
1 x EIDE, 1 x FDD (optional), 1 x K/B, 1 x Mouse, 1 x RS-232/422/485, 1 x RS-232, 1 x LPT
- **USB**
2 USB ports, USB 1.1 compliant
- **Audio**
VIA 82C686 support AC'97 2.0 compliant, Mic-in, Line-in, Line-out
- **IrDA**
115 kbps, IrDA 1.1 compliant
- **GPIO**
N/A

Ethernet

- **Chipset**
RealTek RTL8100
- **Speed**
10/100 Mbps (optional)
- **Interface**
RJ45 connector
- **Standard**
IEEE 802.3u 100 BASE-T Fast Ethernet compatible
Built-in boot ROM in Flash BIOS

Features

- Embedded Intel® ULV Celeron®/LV Intel® Pentium® III Processor
- Fanless, 0 ~ 60° C operation (PCM-9371F-J0A1 & PCM-9371F-M0A1)
- Supports LCD backlight turn-off function
- 100/133 MHz FSB and 4 x AGP graphics for high performance applications
- 2 Channel LVDS interface

Display

- **Chipset**
VIA VT8606 Twister chip with Integrated S3 Savage4 2D/3D/Video Accelerator
- **Memory Size**
8/16/32 MB frame buffer using system memory
- **Resolution**
CRT Mode: 1280 x 1024 @ 16 bpp (60 Hz), 1024 x 768 @ 16 bpp (85 Hz) LCD/Simultaneous Mode: 1280 x 1024 @ 16 bpp (60 Hz), 1024 x 768 @ 16 bpp (60 Hz)
- **LCD Interface**
4 x AGP VGA/LCD interface, Support for 18, 24, 36-bit TFT and 16 or 24-bit DSTN panels up to SXGA resolution
- **LVDS Interface**
2-Channel (2 x 18-bit) LVDS interface
- **TV-Out (optional)**
Supports both NTSC/PAL, S-video and Composite Video via PCM-232 TV-out module
- **Dual Independent Display**
N/A


Mechanical and Environmental

- **Dimension (L x W)**
145 mm x 102 mm (5.7" x 4")
- **Weight**
0.85 kg (weight of total package)
- **Operating Temperature**
0 ~ 60° C (32 ~ 140° F)
- **Operating Humidity**
0% ~ 90% Relative Humidity, noncondensing

Power

- **Power Supply Voltage**
+5 V ± 5%, +12 V ± 5% (PC/104, LCD)
- **Power Consumption**
Max: 4.99 A @ +5 V (with 256 MB, ULV Celeron-650)
Typical: 2.79 A @ +5 V (with 256 MB DRAM, ULV Celeron 400 MHz CPU)
3.19 A @ +5 V (with 256 MB DRAM, ULV Celeron 650 MHz CPU)

Board Diagram

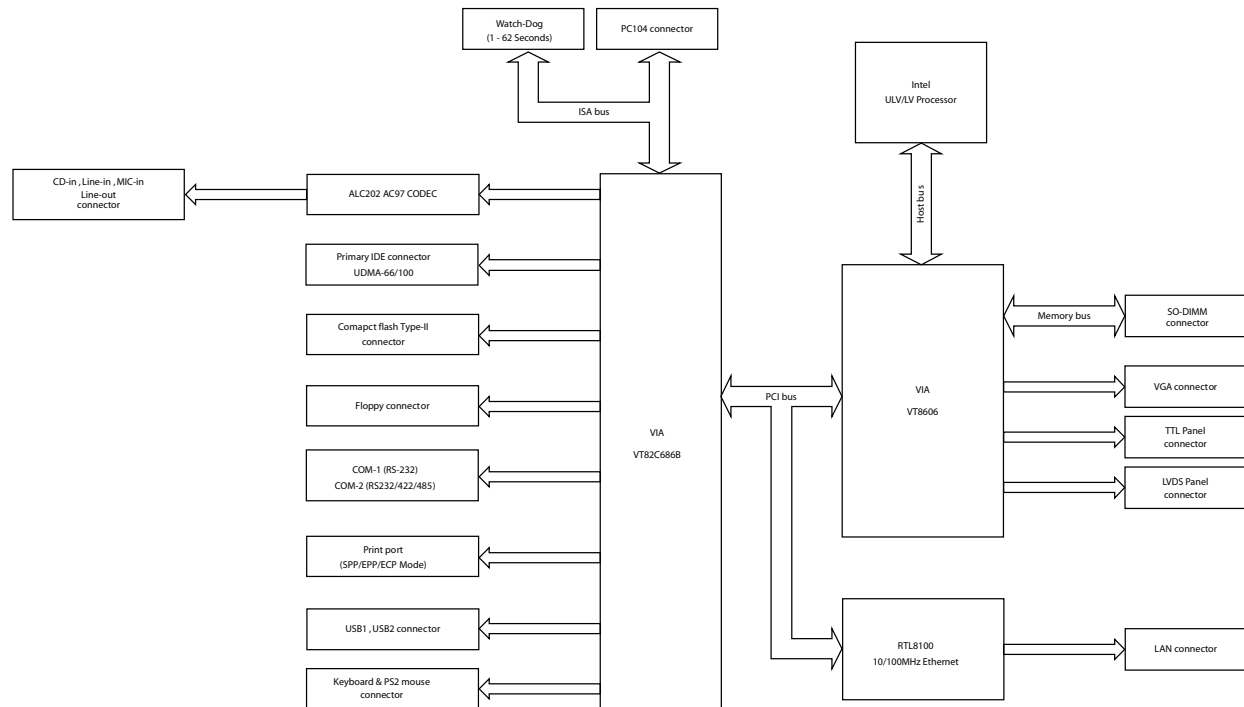

Packing List

- 1 x PCM-9371 SBC
- 1 x Mini Jumper Pack [conts.: 10 pcs] (p/n: 9689000002)
- 1 x IDE flat cable 44p/44p/40p (p/n: 1701440504)
- 1 x Keyboard/ PS2 mouse cable (p/n:1700060202)
- 1 x Second serial port cable (p/n:1701140201)
- 1 x Parallel port cable (p/n:1700260250)
- 1 x Audio cable (p/n:1703100152)
- 1 x USB cable (p/n:1703100121)
- 1 x Startup manual
- 1 x Utility CD

Ordering Information

Standard

- **PCM-9371F-J0A1** ULV Celeron 3.5" SBC w/400 MHz CPU, VGA/LCD, LVDS, Ethernet, Audio
- **PCM-9371F-M0A1** Same as PCM-9371F-J0A1, but with ULV Celeron 650 MHz CPU
- **PCM-9371F-R0A1** Same as PCM-9371F-J0A1, but with LV Pentium III 933 MHz CPU

Optional Accessories

- **1703100260** USB cable 26 cm
- **1703100121** USB cable 12 cm meet MBPC-200 classis
- **1703200201** ATX power control cable
- **PCM-232-00A1** TV-out module for PCM-9373/PCM-9371